
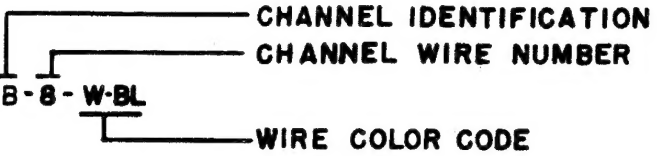
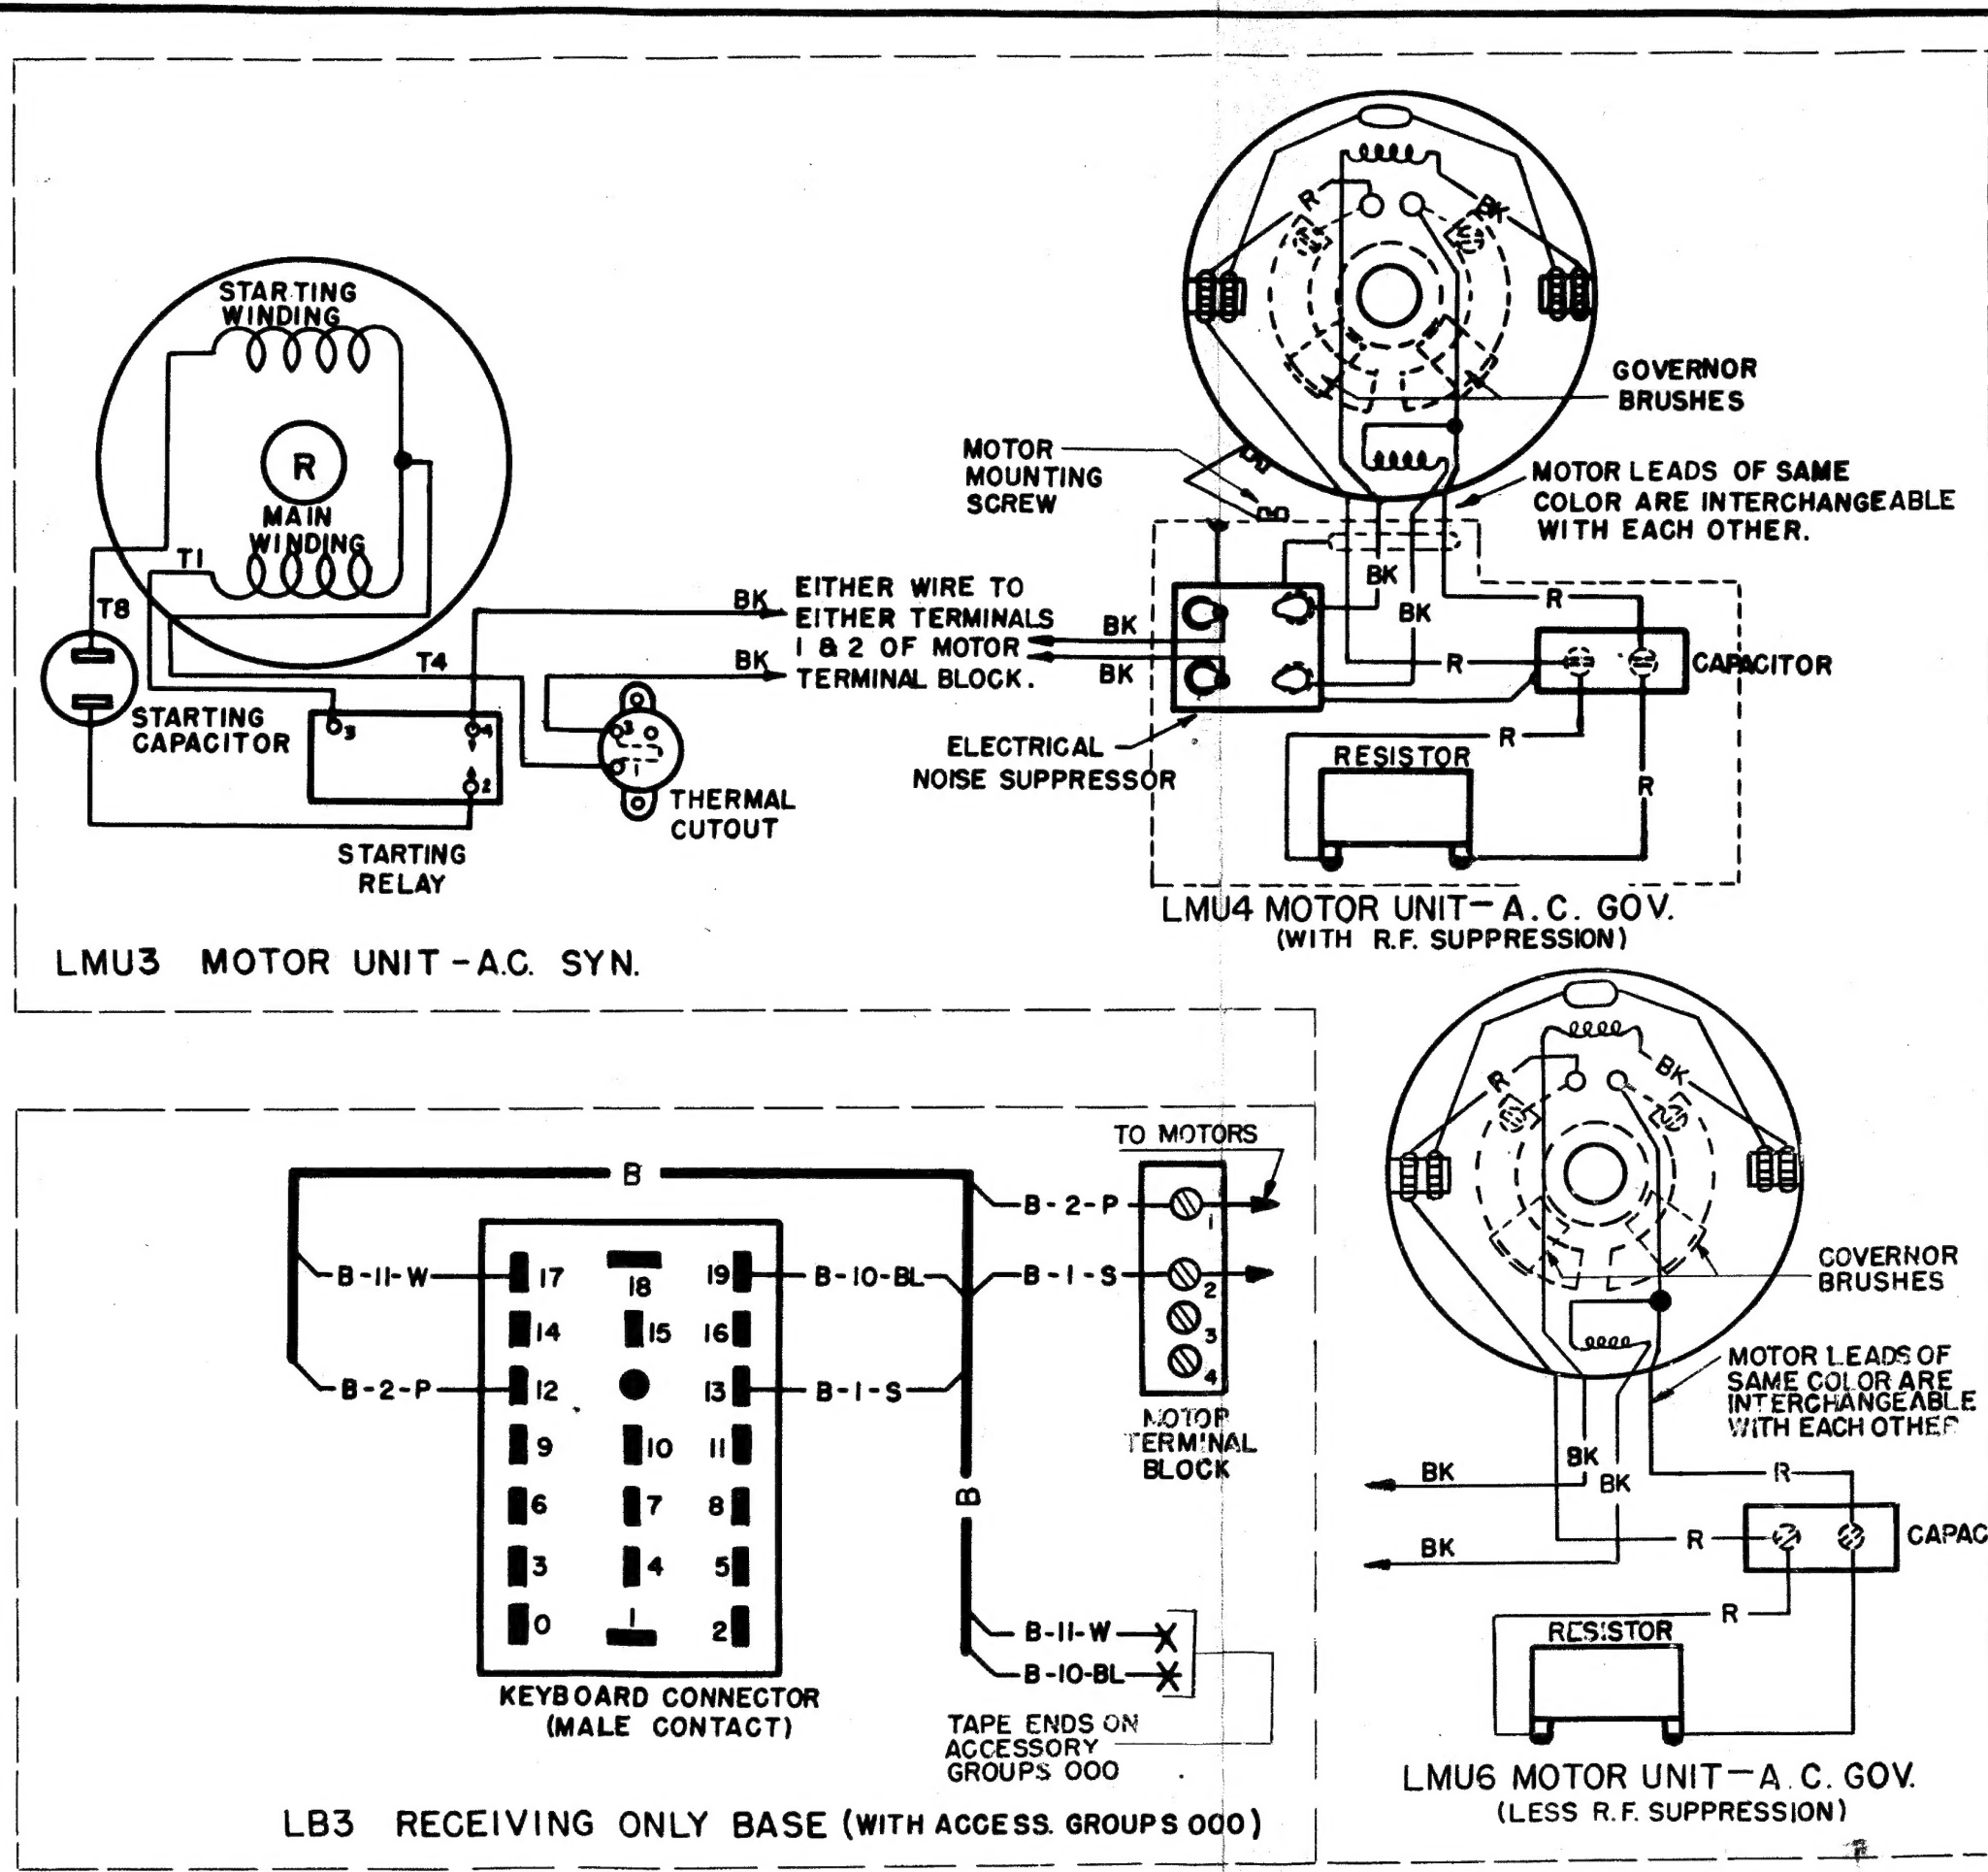


NO.	NOTES
1	WIRING CHANNEL DESIGNATED BY "B" DOES NOT REPRESENT CABLES, BUT ASSISTS IN TRACING CONNECTIONS.
2	CHANNEL LEGEND: 
3	POWER CIRCUITS WIRED FOR 115V A.C. OPERATION ONLY.
4	COLOR CODE: BK - BLACK      BL - BLUE W - WHITE      R - RED Y - YELLOW    BR - BROWN P - PURPLE    O - ORANGE S - SLATE     W-BK-WHITE BLACK W-BL-WHITE BLUE
5	—X— DENOTES TAPED OR SPLICED AND TAPED WIRES. ----- DENOTES SHIELDED WIRES
6	CONNECTOR VIEWED FROM SOLDER TERMINAL ENDS.
7	SHIELDING TO PROTRUDE THROUGH SIGNAL GENERATOR BOX UP TO 1/32 MAX. AFTER SIGNAL GENERATOR ELECTRICAL NOISE SUPPRESSOR IS INSTALLED SOLDER SHIELDED WIRES TO 151365 GROUNDING LUG.
	RTTY ELECTRONICS TELETYPE=Sales-Service-Parts PO Box 20101 El Sobrante, Ca. 94820. (510)222-3192 mr_rtty@pacbell.net

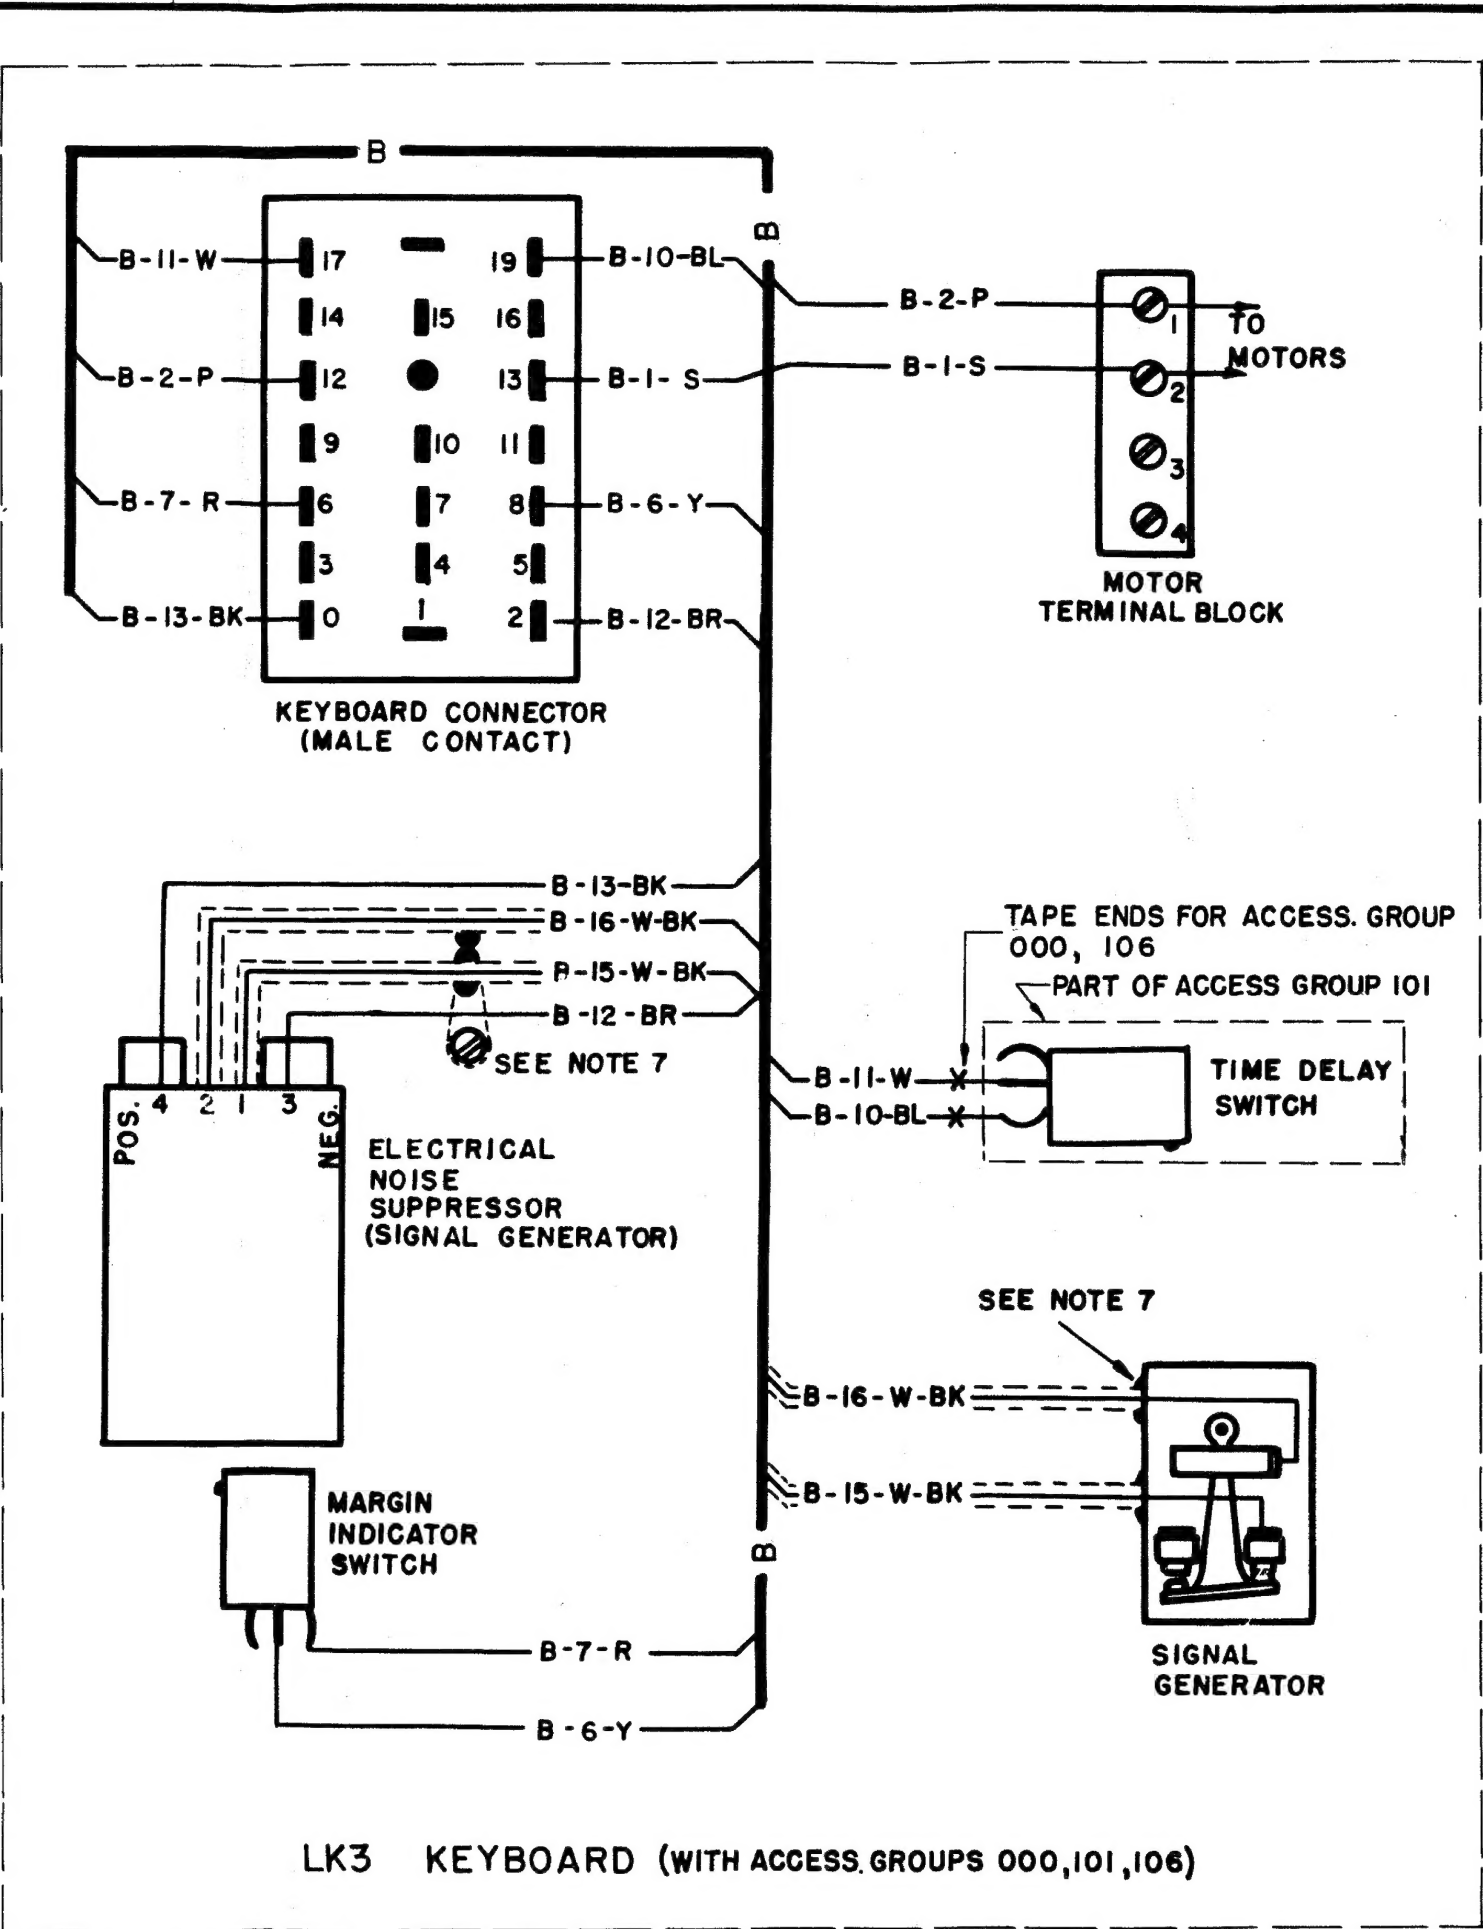

REVISIONS
(A) 6-12-53 28-3668
2862 WD A
4-21-53
ACTUAL WIRING DIAGRAM - MODEL 28
KEYBOARD LK3 ACCESSORY GROUPS 000, 101, 106
REC. ONLY BASE LB3 ACCESSORY GROUPS 000.
MOTOR UNITS LMU 3, 4, 6
DRAWN: RLC APPROVED: B.G.
ENGRD: B.G.
CHECKED: J.R.
FILE 1:30.65.156
TELETYPE CORPORATION